





ROLLER GARAGE DOOR OPENER MYQ CAPABLE

KEY FEATURES WEATHER RESISTANT Market leading IP34 rated housing to help protect from the elements. **LIFTING POWER** Powers doors up to 100 kg. **MYQ CAPABLE** Opener is myQ capable with additional purchase of Safety IR Beams & myQ Gateway.1 Compliant to Australian and New Zealand Standard AS/NZS 60335.2.95

ACCESSORIES INCLUDED



FOUR BUTTON REMOTE CONTROLS

Premium remotes to control up to 4 garage doors or gates. Each button can be programmed to Security+ and Security+ 2.0 devices.



FOUR BUTTON WIRELESS WALL MOUNT REMOTE CONTROL

4 button wall remote to control garage doors, gates and myQ Remote LED Light. Easily programmed to Security+ and Security+ 2.0 devices.

SMART



MYQ CAPABLE TECHNOLOGY lets users create schedules, monitor, receive alerts and control the garage door opener away from home.

WEATHER RESISTANT Market leading IP34 rated housing to help protect from the

QUIET DC MOTOR eliminates noise and vibrations through the ceiling and provide



SOFT-START AND SOFT-STOP for smooth operation.

MYQ CONNECTIVITY BUNDLE

Add monitoring and control away from home. Includes myQ Gateway and The Protector System™ (Safety IR Beams).



CONTROL Easily attaches to your car visor to control up to 4 garage doors or gates. Can be programmed to Security+ and Security+ 2.0 devices.



MYQ REMOTE LED LIGHT Ultra-bright LED light designed to illuminate your garage or workspace. Controlled by a garage door opener, remote control or mvQ App.

WIRELESS SECURITY KEYPAD Convenient and safe access to your

garage without using a remote control or key.

KEY CABLE RELEASE

Allows the opener to be disengaged from your garage door when there is no power or a remote is not available.

åå **HEAVY-LIFTING POWER** operates doors up to 100 kgs.

SAFE & SECURE

QUIET & RELIABLE

elements

3-YEAR WARRANTY

smooth operation.



m|×

SECURITY+ 2.0® sends a new code with every remote click.



E-LOCK control panel buttons can be locked, providing better security.



DUAL SPEED two travel speeds provides greater control and performance.



SLIMLINE DESIGN designed for tight spaces. The opener only requires minimum side room of 40 mm



PREMIUM AUTOMATIC SAFETY REVERSE function will allow your garage door to stop and reverse automatically if obstructed going down or stop going up.



TIMER-TO-CLOSE automatically closes the door after a pre-set amount of time.²



AUTOMATIC FORCE SENSING monitors and adjusts the force needed to open your garage with each operation.



MANUAL RELEASE CORD allows you to open your garage door whenever needed.



 $^1 Additional purchase of Merlin myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit gomerlin.com.au or gomerlin.co.nz for further information. <math display="block">^2 Safety IR Beams must be installed to enable the use of Timer-to-Close. See User Guide for additional information.$

POWERFUL ADD-ONS

E148M

E970M

827AU

CM1702

WeatherDrive

IDEAL FOR POWERING SHEDS AND CARPORT ROLLER DOORS

MR555MYQ







ROLLER GARAGE DOOR OPENER MYQ CAPABLE

Works with my Q smart technology

Additional purchase of The myQ Connectivity Bundle is required.

ΔΡΡ ΔΥΔΙΙ ΔΒΙ Ε ON-






- Set real time notifications to alert you when your garage opens, closes or is left open.
- · Monitor and control your garage door from anywhere.
- Share limited guest access with five people you trust.
- Pre-set scheduling to close your garage door at a certain time.



- · Protect your loved ones and belongings with The Protector System[™] (Safety IR Beams).
- · Peace of mind knowing if your garage door is open or closed anywhere and any

TYPICAL INSTALLATION - ROLLER DOORS

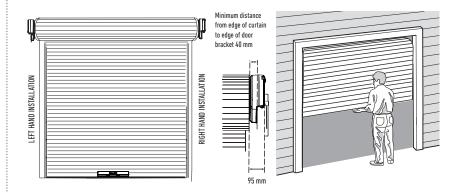

- Maximum lifting under spring tensions: 15 kg
- Suitable for steel spring balanced doors
- Door height: 4.5m; total door area: 15m²
- Single dwelling, max door weight up to 100 kg





SECURITY+ 2.0®

- · Encrypted rolling code across multiple frequencies.
- Security+ 2.0® technology virtually eliminates interference.





RADIO

- · Provides 2-way communication from rolling door opener and accessories.
- Receiver with 64 memory registers.



LIGHTING: LED LIGHTING

- · LED light turns on with activation.
- Garage illumination: 9 premium ultrabright LEDs.

STANDARD SPECIFICATIONS

- IP34 housing
- myQ technology capable²
- · Input Voltage: 240V AC
- Rated door areas up to: 15m²
- Max door height: 4.5m
- · Max door weight: 100 kg
- Max peak pulling force: 500N
- Max lift under spring tension: 15 kg
- · Minimum side room: 40mm

- Radio frequency: 433.30, 434.54 and 433.92 MHz with Security +2.0 technology.
- · Noise rating 1M: 51DB
- Drum rotations: 5.5
- 24V DC motor with thermal overload protection
- Up to 64 memory registers
- Garage illumination: 12 premium ultrabright LEDs





AUSTRALIA

Chamberlain Australia Pty Ltd PO Box 1446 Lane Cove NSW 1595 Australia

gomerlin.com.au

NEW ZEALAND

Chamberlain New Zealand Ltd P0 Box 100-221 North Shore Auckland 0745 New Zealand

1800 638 234

gomerlin.co.nz 0800 653 667

Engineered and designed by The Chamberlain Group, Inc. ©2021 The Chamberlain Group, Inc.™ Trademark of The Chamberlain Group, Inc. ® Registered Trademark of The Chamberlain Group, Inc.



¹Based upon a 2.3m high door at regular speed setting. ²This feature requires monitored Safety IR Beams to be fitted. Linking your myd account to partner may require an additional accessory purchase or subscription fee. Apple, the Apple logo, iPhone, and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC.